


Design:

- / Gas leak proof die cast aluminum casing with anti-corrosion surface treatment
- / Viton lip seal
- / Specific suction filter for biogas application with strainer
- / Closed-coupled electric motor
- / Fully assembled skid (tested and painted)

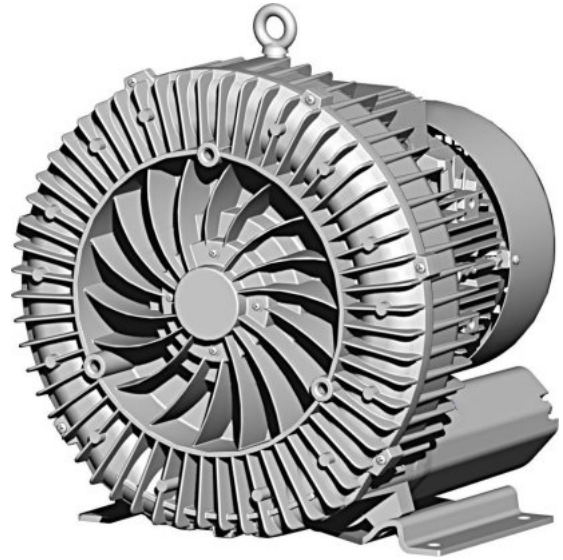

Performances:

- / Flow : to 0 up to 2000 m³/h
- / Pressure: up to 1.05 bar

Standard materials:

- / Aluminum and anodized aluminum casing
- / Other materials according to the customer's technical requirements

Industrial applications:

- / Collection and transport of biogas on landfills
- / Cogeneration
- / Oxygenation of basins
- / Petrol gas booster